

Knowledge Data Discovery

TOPIC 9 - Classification: Advanced Methods (2)

Antoni Wibowo

COURSE OUTLINE

- 1. SUPPORT VECTOR MACHINES (SVM)**
- 2. MODEL EVALUATION AND SELECTION**
- 3. IMPROVING CLASSIFICATION ACCURACY**
- 4. ISSUES ON CLASSIFICATION**




Note:

This slides are based on the additional material provided with the textbook that we use: J. Han, M. Kamber and J. Pei, "Data Mining: Concepts and Techniques" and P. Tan, M. Steinbach, and V. Kumar "Introduction to Data Mining".

Support Vector Machines (SVM)

Classification: A Mathematical Mapping

- **Classification:** predicts categorical class labels
 - E.g., Personal homepage classification
 - $x_i = (x_1, x_2, x_3, \dots)$, $y_i = +1$ or -1
 - x_1 : # of word “homepage”
 - x_2 : # of word “welcome”
- Mathematically, $x \in X = \mathcal{R}^n$, $y \in Y = \{+1, -1\}$,
 - We want to derive a function $f: X \rightarrow Y$
- Linear Classification
 - Binary Classification problem
 - Data above the red line belongs to class ‘x’
 - Data below red line belongs to class ‘o’
 - Examples: SVM, Perceptron, Probabilistic Classifiers

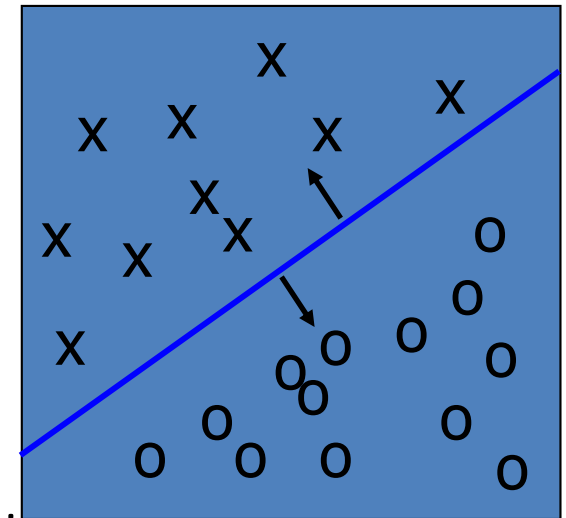

Discriminative Classifiers

- Advantages
 - Prediction accuracy is generally high
 - As compared to Bayesian methods – in general
 - Robust, works when training examples contain errors
 - Fast evaluation of the learned target function
 - Bayesian networks are normally slow
- Criticism
 - Long training time
 - Difficult to understand the learned function (weights)
 - Bayesian networks can be used easily for pattern discovery
 - Not easy to incorporate domain knowledge
 - Easy in the form of priors on the data or distributions


SVM—Support Vector Machines

- A relatively new classification method for both linear and nonlinear data
- It uses a nonlinear mapping to transform the original training data into a higher dimension
- With the new dimension, it searches for the linear optimal separating **hyperplane** (i.e., “decision boundary”)
- With an appropriate nonlinear mapping to a sufficiently high dimension, data from two classes can always be separated by a hyperplane
- SVM finds this hyperplane using **support vectors** (“essential” training tuples) and **margins** (defined by the support vectors)

SVM—History and Applications


- Vapnik and colleagues (1992)—groundwork from Vapnik & Chervonenkis’ statistical learning theory in 1960s
- Features: training can be slow but accuracy is high owing to their ability to model complex nonlinear decision boundaries (margin maximization)
- Used for: classification and numeric prediction
- Applications:
 - handwritten digit recognition, object recognition, speaker identification, benchmarking time-series prediction tests

Support Vector Machines

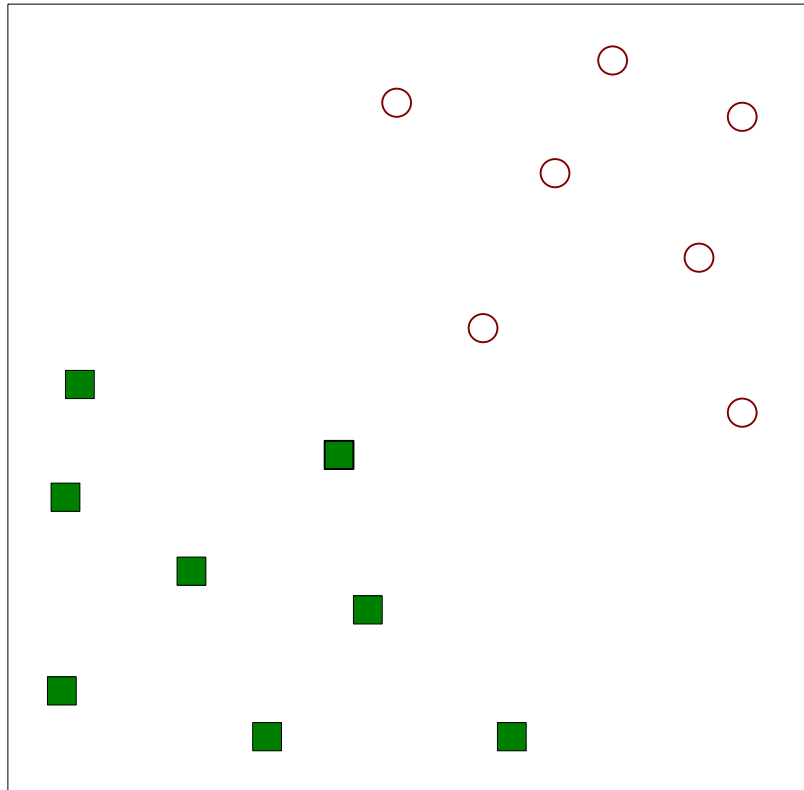


- Find a linear hyperplane (decision boundary) that will separate the data

Support Vector Machines

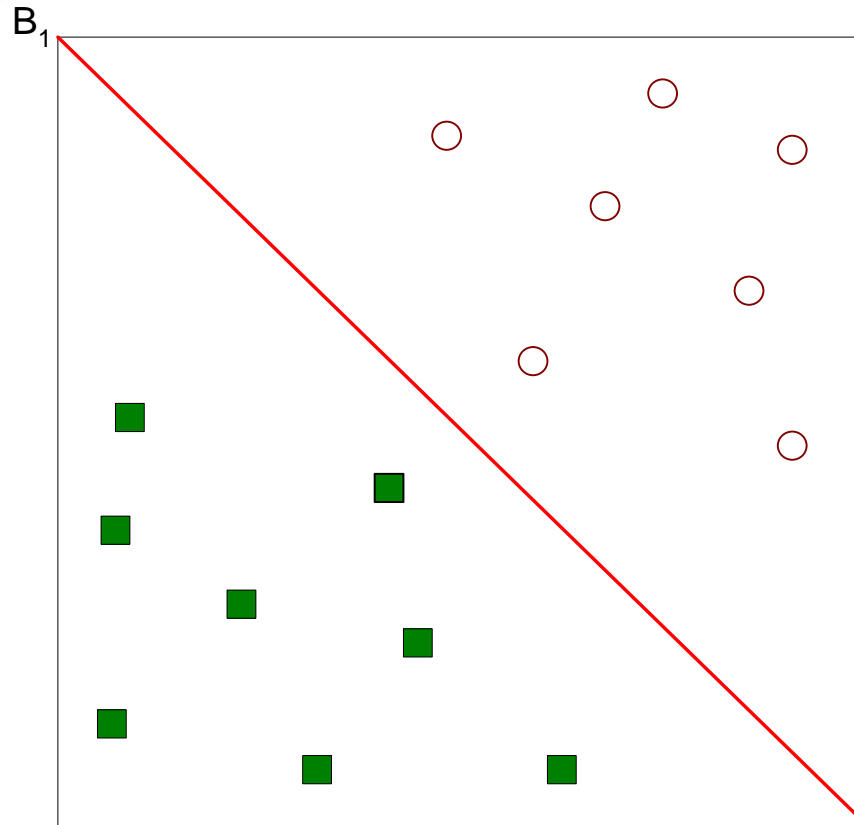


- One Possible Solution

Support Vector Machines

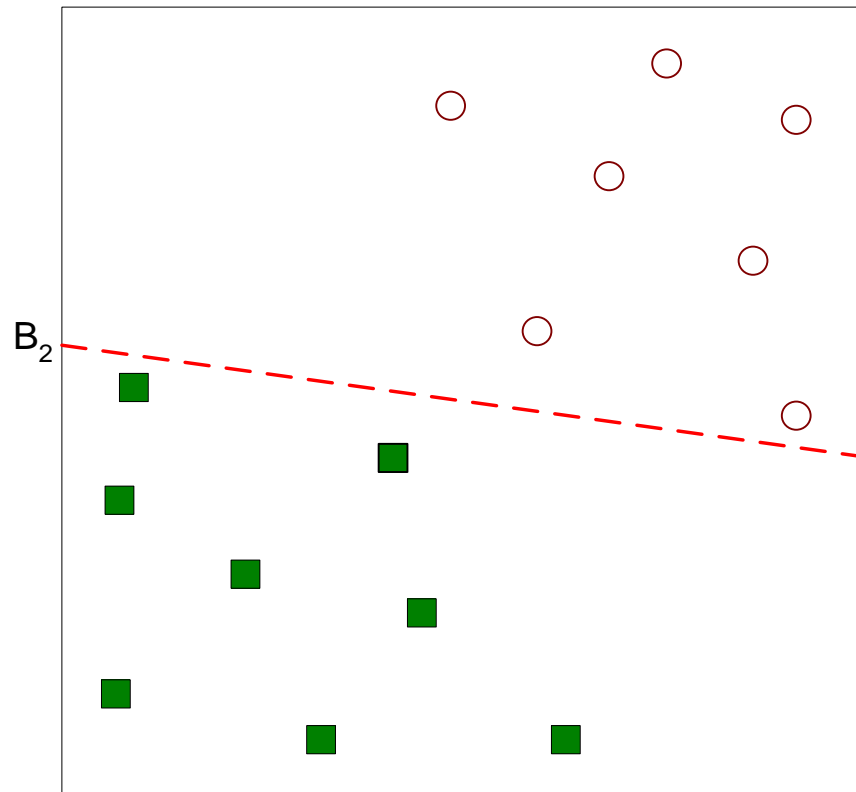


- Another possible solution

Support Vector Machines

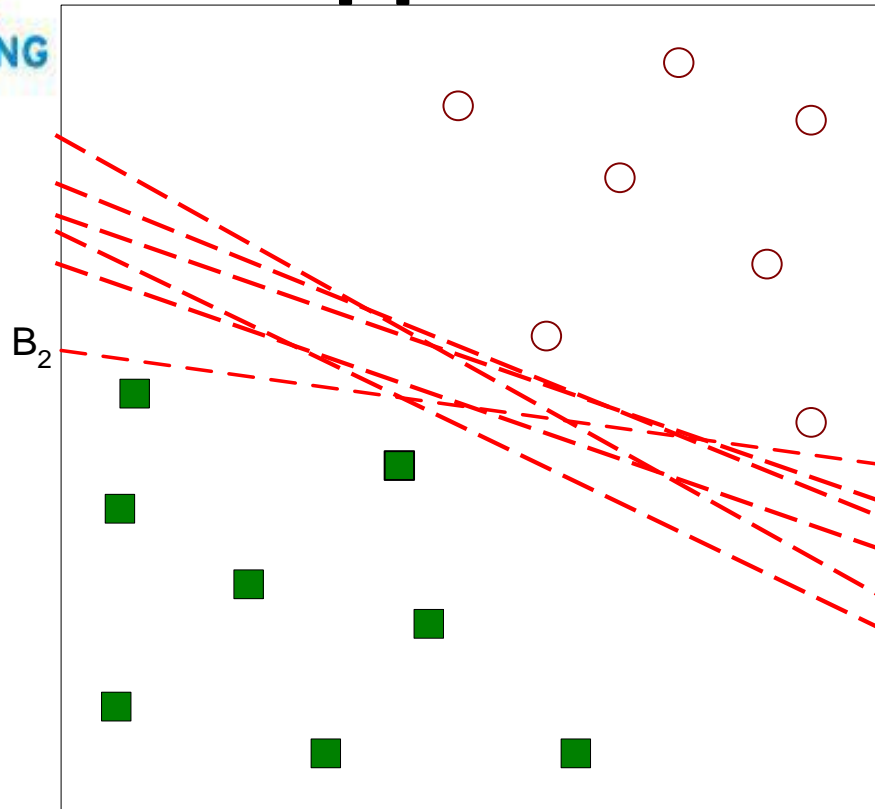


- Other possible solutions

Support Vector Machines

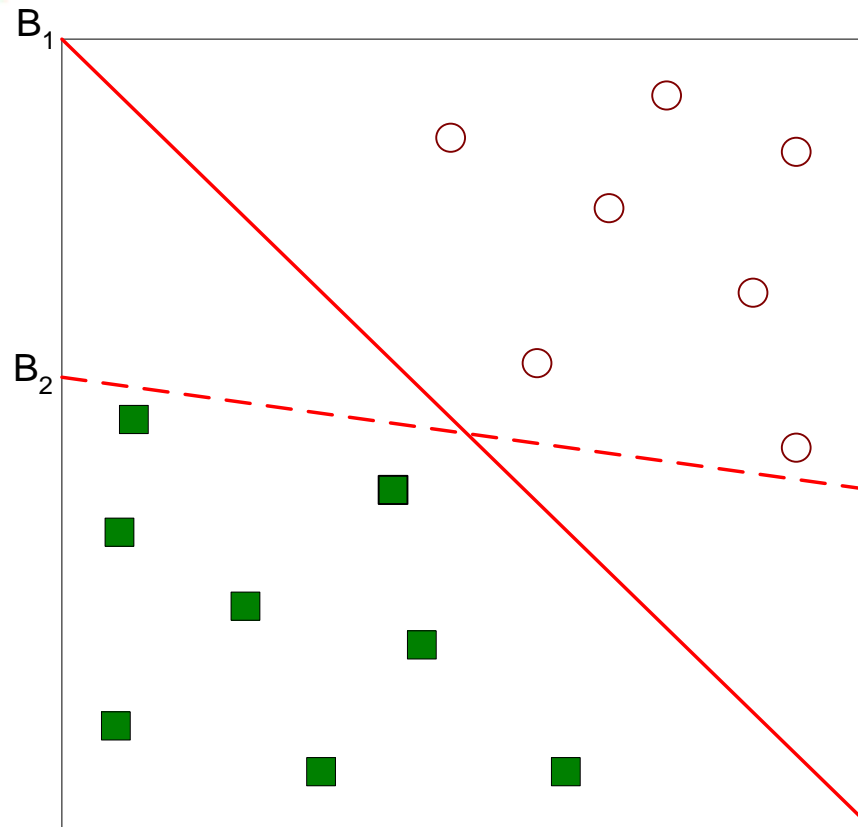


- Which one is better? B_1 or B_2 ?
- How do you define better?

Support Vector Machines

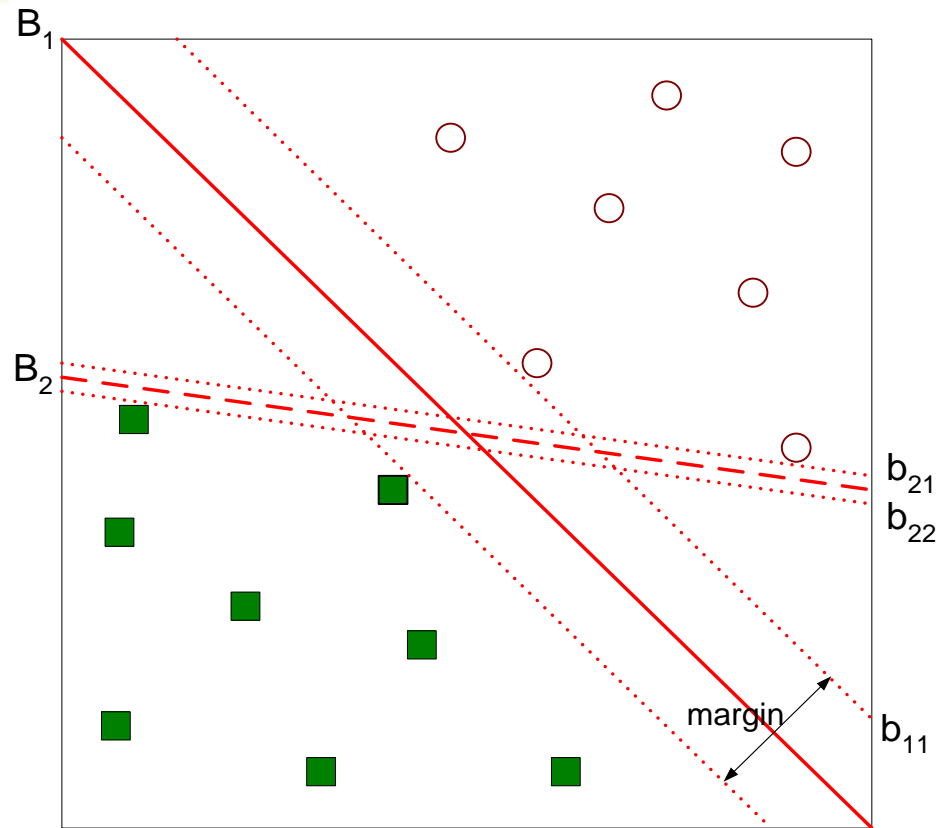

- Find hyperplane **maximizes** the margin \Rightarrow B_1 is better than B_2

Support Vector Machines

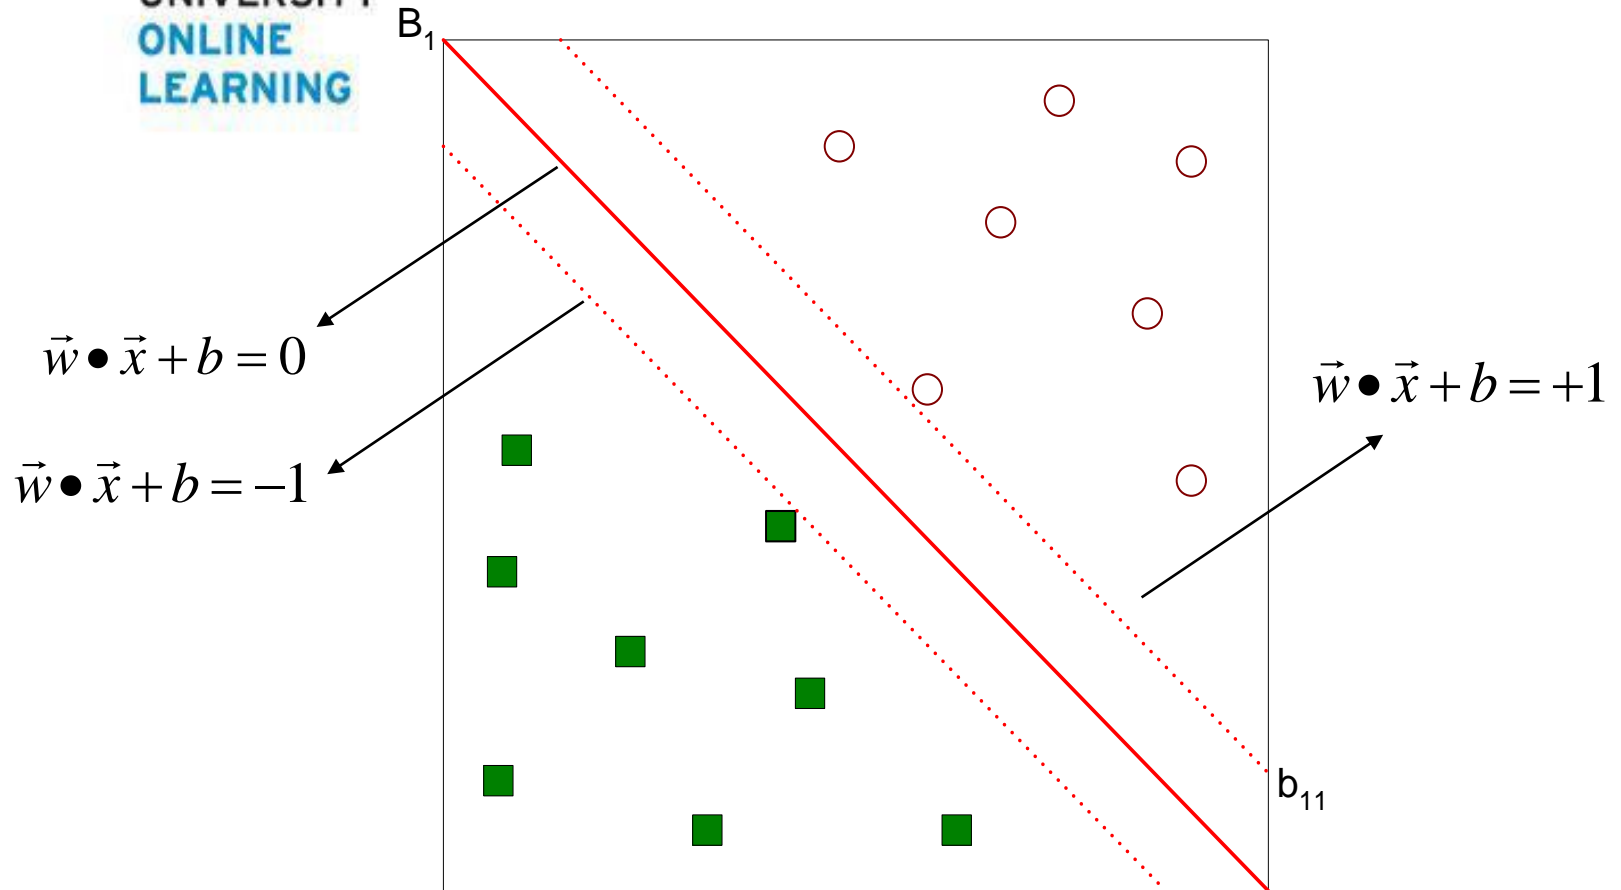

$$f(\vec{x}) = \begin{cases} 1 & \text{if } \vec{w} \bullet \vec{x} + b \geq 1 \\ -1 & \text{if } \vec{w} \bullet \vec{x} + b \leq -1 \end{cases}$$

$$\text{Margin} = \frac{2}{\|\vec{w}\|^2}$$

Support Vector Machines

- We want to maximize: $\text{Margin} = \frac{2}{\|\vec{w}\|^2}$

– Which is equivalent to minimizing:


$$L(w) = \frac{\|\vec{w}\|^2}{2}$$

– But subjected to the following constraints:

$$f(\vec{x}_i) = \begin{cases} 1 & \text{if } \vec{w} \bullet \vec{x}_i + b \geq 1 \\ -1 & \text{if } \vec{w} \bullet \vec{x}_i + b \leq -1 \end{cases}$$

- This is a constrained optimization problem
 - Numerical approaches to solve it (e.g., quadratic programming)

SVM—General Philosophy

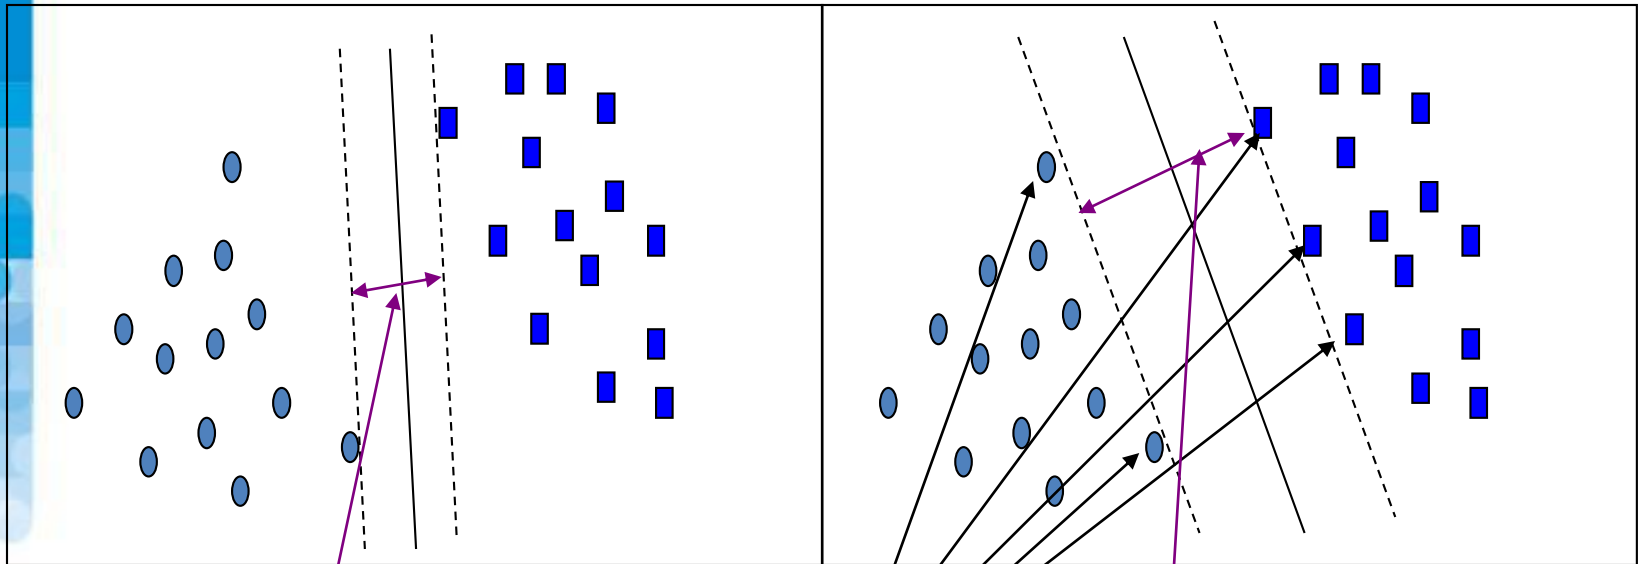


Small Margin

Large Margin

Support Vectors

SVM—When Data Is Linearly Separable

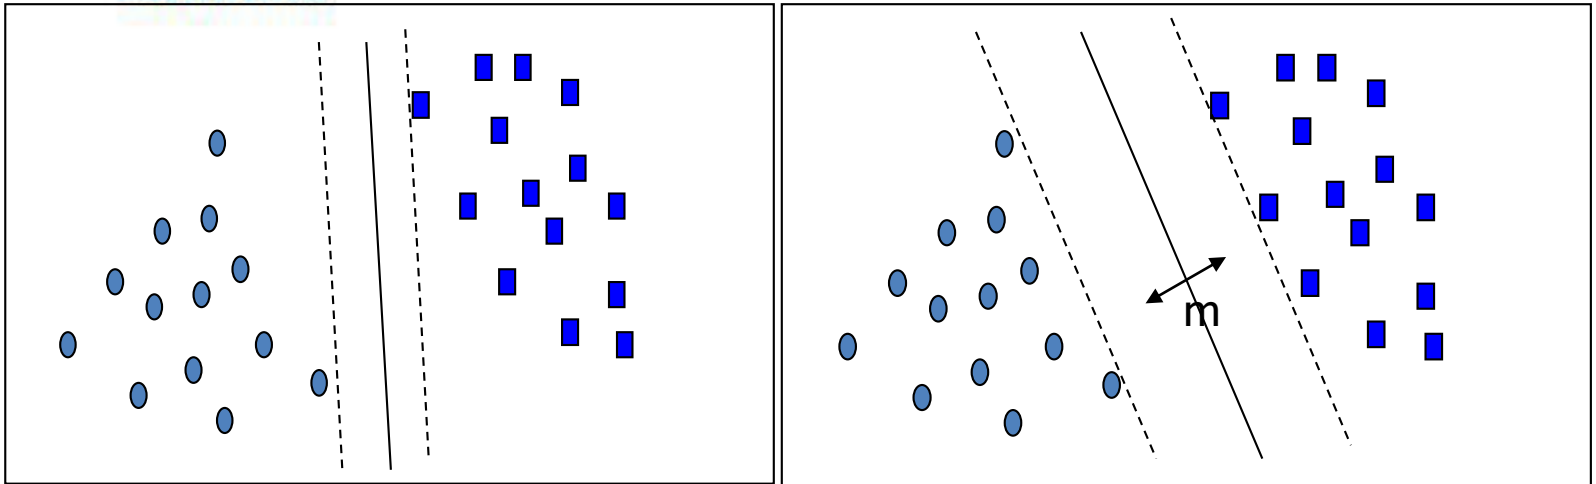

Let data D be $(\mathbf{X}_1, y_1), \dots, (\mathbf{X}_{|D|}, y_{|D|})$, where \mathbf{X}_i is the set of training tuples associated with the class labels y_i

There are infinite lines (hyperplanes) separating the two classes but we want to find the best one (the one that minimizes classification error on unseen data)

*SVM searches for the hyperplane with the largest margin, i.e., **maximum marginal hyperplane** (MMH)*

SVM—Linearly Separable

- A separating hyperplane can be written as

$$\mathbf{W} \bullet \mathbf{X} + b = 0$$

where $\mathbf{W} = \{w_1, w_2, \dots, w_n\}$ is a weight vector and b a scalar (bias)

- For 2-D it can be written as

$$w_0 + w_1 x_1 + w_2 x_2 = 0$$

- The hyperplane defining the sides of the margin:

$$H_1: w_0 + w_1 x_1 + w_2 x_2 \geq 1 \quad \text{for } y_i = +1, \text{ and}$$

$$H_2: w_0 + w_1 x_1 + w_2 x_2 \leq -1 \quad \text{for } y_i = -1$$

- Any training tuples that fall on hyperplanes H_1 or H_2 (i.e., the sides defining the margin) are **support vectors**
- This becomes a **constrained (convex) quadratic optimization** problem: Quadratic objective function and linear constraints \rightarrow *Quadratic Programming (QP)* \rightarrow Lagrangian multipliers

Why Is SVM Effective on High Dimensional Data?

- The **complexity** of trained classifier is characterized by the # of support vectors rather than the dimensionality of the data
- The **support vectors** are the essential or critical training examples — they lie closest to the decision boundary (MMH)
- If all other training examples are removed and the training is repeated, the same separating hyperplane would be found
- The number of support vectors found can be used to compute an (upper) bound on the expected error rate of the SVM classifier, which is independent of the data dimensionality
- Thus, an SVM with a small number of support vectors can have good generalization, even when the dimensionality of the data is high

SVM—Linearly Inseparable

- Transform the original input data into a higher dimensional space


Example 6.8 Nonlinear transformation of original input data into a higher dimensional space. Consider the following example. A 3D input vector $\mathbf{X} = (x_1, x_2, x_3)$ is mapped into a 6D space Z using the mappings $\phi_1(\mathbf{X}) = x_1$, $\phi_2(\mathbf{X}) = x_2$, $\phi_3(\mathbf{X}) = x_3$, $\phi_4(\mathbf{X}) = (x_1)^2$, $\phi_5(\mathbf{X}) = x_1x_2$, and $\phi_6(\mathbf{X}) = x_1x_3$. A decision hyperplane in the new space is $d(\mathbf{Z}) = \mathbf{WZ} + b$, where \mathbf{W} and \mathbf{Z} are vectors. This is linear. We solve for \mathbf{W} and b and then substitute back so that we see that the linear decision hyperplane in the new (\mathbf{Z}) space corresponds to a nonlinear second order polynomial in the original 3-D input space,

$$\begin{aligned} d(\mathbf{Z}) &= w_1x_1 + w_2x_2 + w_3x_3 + w_4(x_1)^2 + w_5x_1x_2 + w_6x_1x_3 + b \\ &= w_1z_1 + w_2z_2 + w_3z_3 + w_4z_4 + w_5z_5 + w_6z_6 + b \end{aligned} \quad \blacksquare$$

- Search for a linear separating hyperplane in the new space


Support Vector Machines

- What if the problem is not linearly separable?

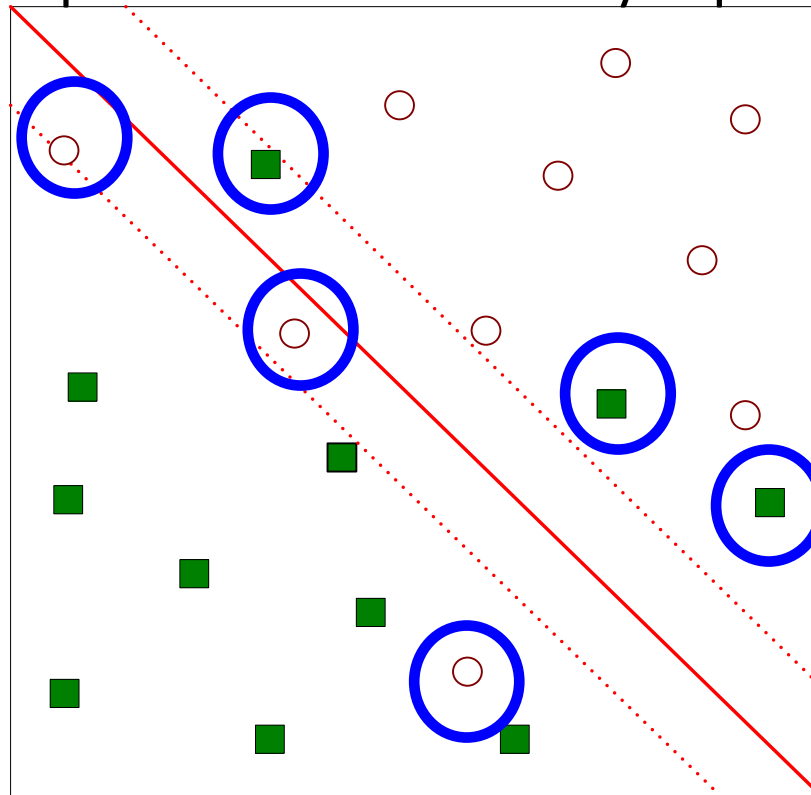

Nonlinear Support Vector Machines

- Transform data into higher dimensional space

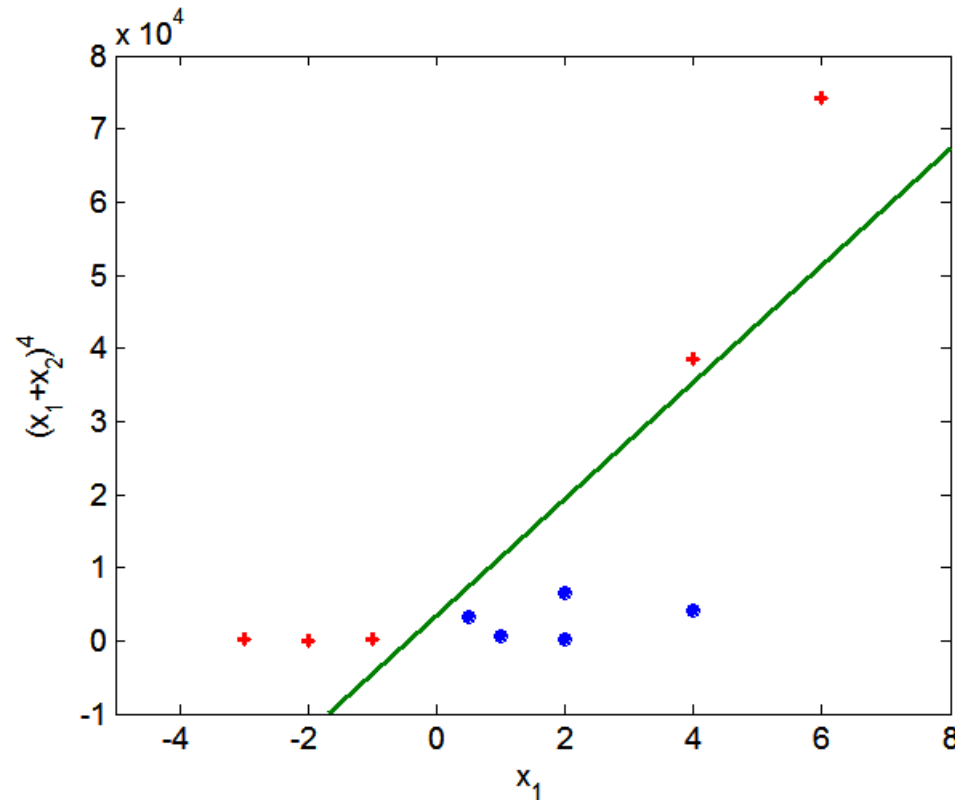

Support Vector Machines

- What if the problem is not linearly separable?
 - Introduce slack variables

- Need to minimize:

$$L(w) = \frac{\|\vec{w}\|^2}{2} + C \left(\sum_{i=1}^N \xi_i \right)$$

- Subject to:

$$f(\vec{x}_i) = \begin{cases} 1 & \text{if } \vec{w} \bullet \vec{x}_i + b \geq 1 - \xi_i \\ -1 & \text{if } \vec{w} \bullet \vec{x}_i + b \leq -1 + \xi_i \end{cases}$$

Kernel functions for Nonlinear Classification

- Instead of computing the dot product on the transformed data, it is math. equivalent to applying a kernel function $K(\mathbf{X}_i, \mathbf{X}_j)$ to the original data, i.e., $K(\mathbf{X}_i, \mathbf{X}_j) = \Phi(\mathbf{X}_i) \cdot \Phi(\mathbf{X}_j)$
- Typical Kernel Functions

Polynomial kernel of degree h : $K(\mathbf{X}_i, \mathbf{X}_j) = (\mathbf{X}_i \cdot \mathbf{X}_j + 1)^h$


Gaussian radial basis function kernel : $K(\mathbf{X}_i, \mathbf{X}_j) = e^{-\|\mathbf{X}_i - \mathbf{X}_j\|^2 / 2\sigma^2}$

Sigmoid kernel : $K(\mathbf{X}_i, \mathbf{X}_j) = \tanh(\kappa \mathbf{X}_i \cdot \mathbf{X}_j - \delta)$

- SVM can also be used for classifying multiple (> 2) classes and for regression analysis (with additional parameters)

Nonlinear Support Vector Machines

- What if decision boundary is not linear?

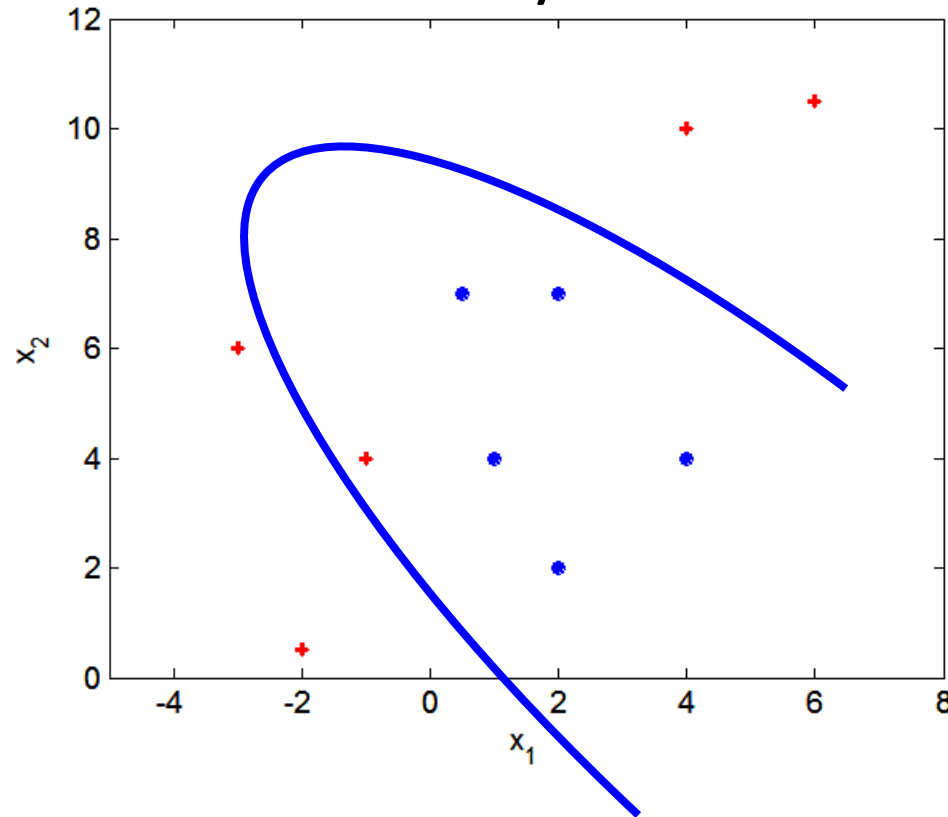


Scaling SVM by Hierarchical Micro-Clustering

- SVM is not scalable to the number of data objects in terms of training time and memory usage
- H. Yu, J. Yang, and J. Han, “[Classifying Large Data Sets Using SVM with Hierarchical Clusters](#)”, KDD'03)
- CB-SVM (Clustering-Based SVM)
 - Given limited amount of system resources (e.g., memory), maximize the SVM performance in terms of accuracy and the training speed
 - Use micro-clustering to effectively reduce the number of points to be considered
 - At deriving support vectors, de-cluster micro-clusters near “candidate vector” to ensure high classification accuracy

Selective Declustering: Ensure High Accuracy


- CF tree is a suitable base structure for selective declustering
- De-cluster only the cluster E_i such that
 - $D_i - R_i < D_s$, where D_i is the distance from the boundary to the center point of E_i and R_i is the radius of E_i
 - Decluster only the cluster whose subclusters have possibilities to be the support cluster of the boundary
- “Support cluster”: The cluster whose centroid is a support vector

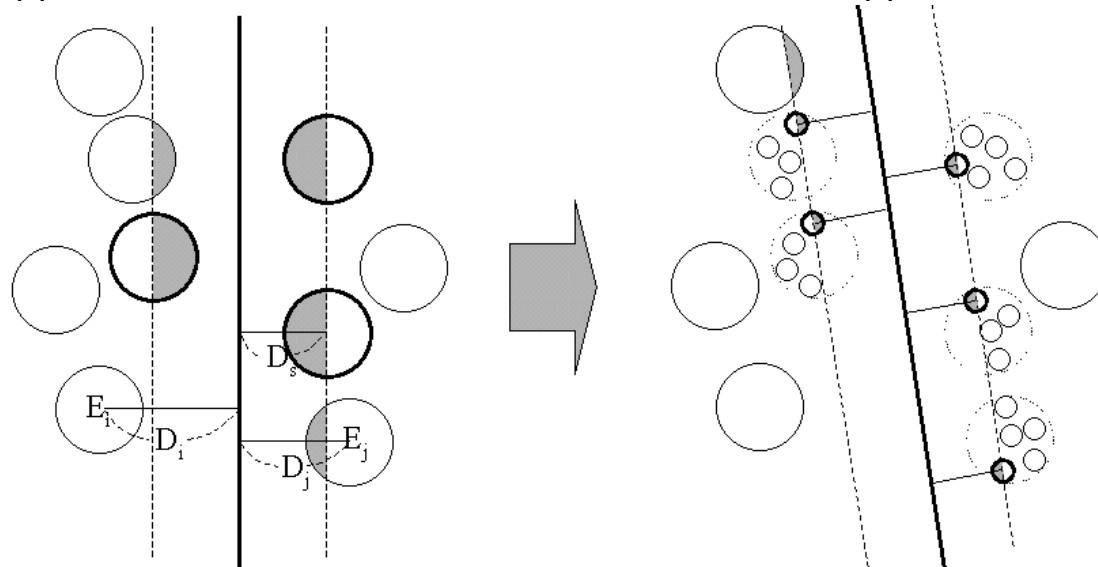


CB-SVM Algorithm: Outline

- Construct two CF-trees from positive and negative data sets independently
 - Need one scan of the data set
- Train an SVM from the centroids of the root entries
- De-cluster the entries near the boundary into the next level
 - The children entries de-clustered from the parent entries are accumulated into the training set with the non-declustered parent entries
- Train an SVM again from the centroids of the entries in the training set
- Repeat until nothing is accumulated


Accuracy and Scalability on Synthetic Dataset

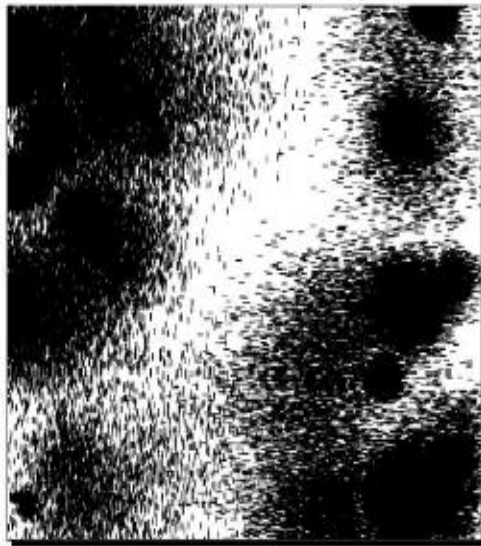

(a) original data set ($N = 113601$)

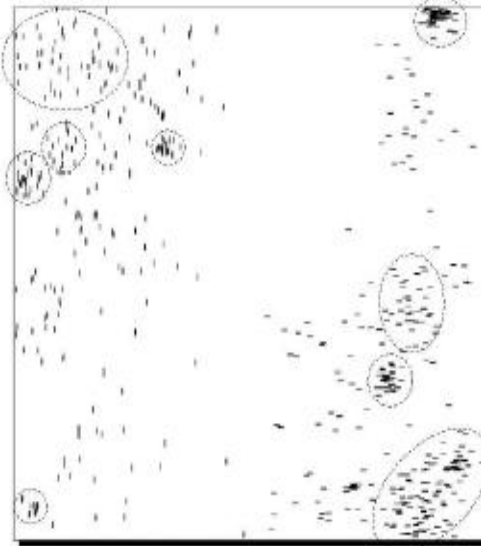

(b) 0.5% randomly sampled data
($N = 603$)

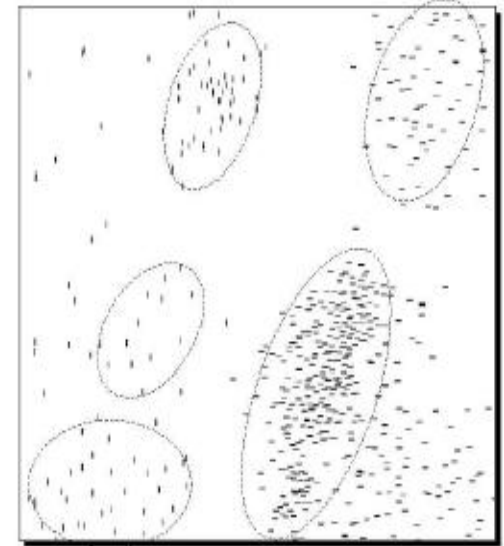

(c) data distribution at the last iteration in
CB-SVM ($N = 597$)

Figure 6: Synthetic data set in a two-dimensional space. ‘|’: positive data; ‘-’: negative data

- Experiments on large synthetic data sets shows better accuracy than random sampling approaches and far more scalable than the original SVM algorithm

SVM vs. Neural Network

- SVM
 - Deterministic algorithm
 - Nice generalization properties
 - Hard to learn – learned in batch mode using quadratic programming techniques
 - Using kernels can learn very complex functions
- Neural Network
 - Nondeterministic algorithm
 - Generalizes well but doesn't have strong mathematical foundation
 - Can easily be learned in incremental fashion
 - To learn complex functions—use multilayer perceptron (nontrivial)

SVM Related Links

- SVM Website: <http://www.kernel-machines.org/>
- Representative implementations
 - **LIBSVM**: an efficient implementation of SVM, multi-class classifications, nu-SVM, one-class SVM, including also various interfaces with java, python, etc.
 - **SVM-light**: simpler but performance is not better than LIBSVM, support only binary classification and only in C
 - **SVM-torch**: another recent implementation also written in C

The background is a solid blue color with three large, overlapping, semi-transparent circles of a lighter shade of blue. The circles are arranged in a triangular pattern, with one circle on the left and two on the right, overlapping each other and the left one.

Model Evaluation and Selection

Model Evaluation and Selection

- Evaluation metrics: How can we measure accuracy? Other metrics to consider?
- Use **validation test set** of class-labeled tuples instead of training set when assessing accuracy
- Methods for estimating a classifier's accuracy:
 - Holdout method, random subsampling
 - Cross-validation
 - Bootstrap
- Comparing classifiers:
 - Confidence intervals
 - Cost-benefit analysis and ROC Curves

Classifier Evaluation Metrics: Confusion Matrix

Confusion Matrix:

Actual class \ Predicted class	C_1	$\neg C_1$
C_1	True Positives (TP)	False Negatives (FN)
$\neg C_1$	False Positives (FP)	True Negatives (TN)

Example of Confusion Matrix:

Actual class \ Predicted class	buy_computer = yes	buy_computer = no	Total
buy_computer = yes	6954	46	7000
buy_computer = no	412	2588	3000
Total	7366	2634	10000

- Given m classes, an entry, $CM_{i,j}$ in a **confusion matrix** indicates # of tuples in class i that were labeled by the classifier as class j
- May have extra rows/columns to provide totals

Classifier Evaluation Metrics: Accuracy, Error Rate, Sensitivity and Specificity

A\P	C	-C	
C	TP	FN	P
-C	FP	TN	N
	P'	N'	All

- **Classifier Accuracy**, or recognition rate: percentage of test set tuples that are correctly classified

$$\text{Accuracy} = (TP + TN)/All$$
- **Error rate**: $1 - \text{accuracy}$, or

$$\text{Error rate} = (FP + FN)/All$$

- **Class Imbalance Problem**:
 - One class may be *rare*, e.g. fraud, or HIV-positive
 - Significant *majority of the negative class* and minority of the positive class
 - **Sensitivity**: True Positive recognition rate
 - **Sensitivity = TP/P**
 - **Specificity**: True Negative recognition rate
 - **Specificity = TN/N**

Classifier Evaluation Metrics: Precision and Recall, and F-measures

- **Precision:** exactness – what % of tuples that the classifier labeled as positive are actually positive

$$precision = \frac{TP}{TP + FP}$$

- **Recall:** completeness – what % of positive tuples did the classifier label as positive?

$$recall = \frac{TP}{TP + FN}$$

- Perfect score is 1.0
- Inverse relationship between precision & recall
- **F measure (F_1 or F-score):** harmonic mean of precision and recall,

$$F = \frac{2 \times precision \times recall}{precision + recall}$$

- **F_β :** weighted measure of precision and recall
 - assigns β times as much weight to recall as to precision

$$F_\beta = \frac{(1 + \beta^2) \times precision \times recall}{\beta^2 \times precision + recall}$$

Classifier Evaluation Metrics: Example

Actual Class \ Predicted class	cancer = yes	cancer = no	Total	Recognition(%)
cancer = yes	90	210	300	30.00 (<i>sensitivity</i>)
cancer = no	140	9560	9700	98.56 (<i>specificity</i>)
Total	230	9770	10000	96.40 (<i>accuracy</i>)

- $Precision = 90/230 = 39.13\%$

$Recall = 90/300 = 30.00\%$

Evaluating Classifier Accuracy: Holdout & Cross-Validation Methods

- **Holdout method**
 - Given data is randomly partitioned into two independent sets
 - Training set (e.g., 2/3) for model construction
 - Test set (e.g., 1/3) for accuracy estimation
 - Random sampling: a variation of holdout
 - Repeat holdout k times, accuracy = avg. of the accuracies obtained
- **Cross-validation** (k -fold, where $k = 10$ is most popular)
 - Randomly partition the data into k *mutually exclusive* subsets, each approximately equal size
 - At i -th iteration, use D_i as test set and others as training set
 - Leave-one-out: k folds where $k = \#$ of tuples, for small sized data
 - ***Stratified cross-validation***: folds are stratified so that class dist. in each fold is approx. the same as that in the initial data

Evaluating Classifier Accuracy: Bootstrap

- **Bootstrap**
 - Works well with small data sets
 - Samples the given training tuples uniformly *with replacement*
 - i.e., each time a tuple is selected, it is equally likely to be selected again and re-added to the training set
- Several bootstrap methods, and a common one is **.632 bootstrap**
 - A data set with d tuples is sampled d times, with replacement, resulting in a training set of d samples. The data tuples that did not make it into the training set end up forming the test set. About 63.2% of the original data end up in the bootstrap, and the remaining 36.8% form the test set (since $(1 - 1/d)^d \approx e^{-1} = 0.368$)
 - Repeat the sampling procedure k times. overall accuracy of the model:

$$Acc(M) = \frac{1}{k} \sum_{i=1}^k (0.632 \times Acc(M_i)_{test_set} + 0.368 \times Acc(M_i)_{train_set})$$

Estimating Confidence Intervals: Classifier Models M_1 vs. M_2

- Suppose we have 2 classifiers, M_1 and M_2 , which one is better?
- Use 10-fold cross-validation to obtain $\overline{err}(M_1)$ and $\overline{err}(M_2)$
- These mean error rates are just *estimates* of error on the true population of *future* data cases
- What if the difference between the 2 error rates is just attributed to *chance*?
 - Use a **test of statistical significance**
 - Obtain **confidence limits** for our error estimates

Estimating Confidence Intervals: Null Hypothesis

- Perform 10-fold cross-validation
- Assume samples follow a **t distribution** with $k-1$ degrees of freedom (here, $k=10$)
- Use **t-test** (or **Student's t-test**)
- **Null Hypothesis:** M_1 & M_2 are the same
- If we can **reject** null hypothesis, then
 - we conclude that the difference between M_1 & M_2 is **statistically significant**
 - Chose model with lower error rate

Estimating Confidence Intervals: t-test

- If only 1 test set available: **pairwise comparison**
 - For i^{th} round of 10-fold cross-validation, the same cross partitioning is used to obtain $err(M_1)_i$ and $err(M_2)_i$ $\overline{err}(M_1)$ and $\overline{err}(M_2)$
 - Average over 10 rounds to get
 - **t-test** computes **t-statistic** with $k-1$ degrees of freedom:

$$t = \frac{\overline{err}(M_1) - \overline{err}(M_2)}{\sqrt{\text{var}(M_1 - M_2)/k}} \quad \text{where}$$

$$\text{var}(M_1 - M_2) = \frac{1}{k} \sum_{i=1}^k \left[err(M_1)_i - err(M_2)_i - (\overline{err}(M_1) - \overline{err}(M_2)) \right]^2$$


- If two test sets available: use **non-paired t-test**

where

$$\text{var}(M_1 - M_2) = \sqrt{\frac{\text{var}(M_1)}{k_1} + \frac{\text{var}(M_2)}{k_2}},$$

where k_1 & k_2 are # of cross-validation samples used for M_1 & M_2 , resp.

Estimating Confidence Intervals: Table for t-distribution

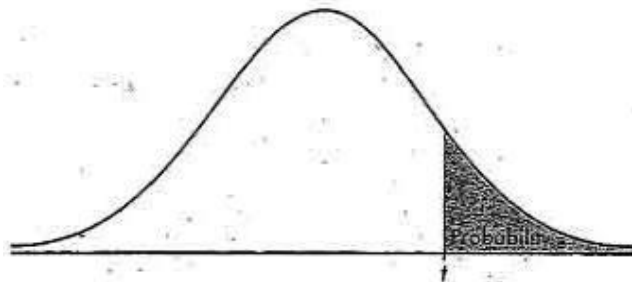

- Symmetric
- **Significance level**, e.g., $sig = 0.05$ or 5% means M_1 & M_2 are significantly different for 95% of population
- **Confidence limit**, $z = sig/2$

TABLE B: t-DISTRIBUTION CRITICAL VALUES


df	Tail probability p											
	.25	.20	.15	.10	.05	.025	.02	.01	.005	.0025	.001	.0005
1	1.000	1.376	1.963	3.078	6.314	12.71	15.89	31.82	63.66	127.3	318.3	636.6
2	.816	1.061	1.386	1.886	2.920	4.303	4.849	6.965	9.925	14.09	22.33	31.60
3	.765	.978	1.250	1.638	2.353	3.182	3.482	4.541	5.841	7.453	10.21	12.92
4	.741	.941	1.190	1.533	2.132	2.776	2.999	3.747	4.604	5.598	7.173	8.610
5	.727	.920	1.156	1.476	2.015	2.571	2.757	3.365	4.032	4.773	5.893	6.869
6	.718	.906	1.134	1.440	1.943	2.447	2.612	3.143	3.707	4.317	5.208	5.959
7	.711	.896	1.119	1.415	1.895	2.365	2.517	2.998	3.499	4.029	4.785	5.408
8	.706	.889	1.108	1.397	1.860	2.306	2.449	2.896	3.355	3.833	4.501	5.041
9	.703	.883	1.100	1.383	1.833	2.262	2.398	2.821	3.250	3.690	4.297	4.781
10	.700	.879	1.093	1.372	1.812	2.228	2.359	2.764	3.169	3.581	4.144	4.587
11	.697	.876	1.088	1.363	1.796	2.201	2.328	2.718	3.106	3.497	4.025	4.437
12	.695	.873	1.083	1.356	1.782	2.179	2.303	2.681	3.055	3.428	3.930	4.318
13	.694	.870	1.079	1.350	1.771	2.160	2.282	2.650	3.012	3.372	3.852	4.221
14	.692	.868	1.076	1.345	1.761	2.145	2.264	2.624	2.977	3.326	3.787	4.140
15	.691	.866	1.074	1.341	1.753	2.131	2.249	2.602	2.947	3.286	3.733	4.073
16	.690	.865	1.071	1.337	1.746	2.120	2.235	2.583	2.921	3.252	3.686	4.015
17	.689	.863	1.069	1.333	1.740	2.110	2.224	2.567	2.898	3.222	3.646	3.965
18	.688	.862	1.067	1.330	1.734	2.101	2.214	2.552	2.878	3.197	3.611	3.922
19	.688	.861	1.066	1.328	1.729	2.093	2.205	2.539	2.861	3.174	3.579	3.883
20	.687	.860	1.064	1.325	1.725	2.086	2.197	2.528	2.845	3.153	3.552	3.850
21	.686	.859	1.063	1.323	1.721	2.080	2.189	2.518	2.831	3.135	3.527	3.819
22	.686	.858	1.061	1.321	1.717	2.074	2.183	2.508	2.819	3.119	3.505	3.792
23	.685	.858	1.060	1.319	1.714	2.069	2.177	2.500	2.807	3.104	3.485	3.768
24	.685	.857	1.059	1.318	1.711	2.064	2.172	2.492	2.797	3.091	3.467	3.745
25	.684	.856	1.058	1.316	1.708	2.060	2.167	2.485	2.787	3.078	3.450	3.728
26	.684	.856	1.058	1.315	1.706	2.056	2.162	2.479	2.779	3.067	3.435	3.707
27	.684	.855	1.057	1.314	1.703	2.052	2.158	2.473	2.771	3.057	3.421	3.690
28	.683	.855	1.056	1.313	1.701	2.048	2.154	2.467	2.763	3.047	3.408	3.674
29	.683	.854	1.055	1.311	1.699	2.045	2.150	2.462	2.756	3.038	3.396	3.659
30	.683	.854	1.055	1.310	1.697	2.042	2.147	2.457	2.750	3.030	3.385	3.646
40	.681	.851	1.050	1.303	1.684	2.021	2.123	2.423	2.704	2.971	3.307	3.551
50	.679	.849	1.047	1.299	1.676	2.009	2.109	2.403	2.678	2.937	3.261	3.496
60	.679	.848	1.045	1.296	1.671	2.000	2.099	2.390	2.660	2.915	3.232	3.460
80	.678	.846	1.043	1.292	1.664	1.990	2.088	2.374	2.639	2.887	3.195	3.416
100	.677	.845	1.042	1.290	1.660	1.984	2.081	2.364	2.626	2.871	3.174	3.390
∞	.675	.842	1.037	1.282	1.646	1.962	2.056	2.330	2.581	2.813	3.098	3.300
	.674	.841	1.036	1.282	1.645	1.960	2.054	2.326	2.576	2.807	3.091	3.291
	50%	60%	70%	80%	90%	95%	96%	98%	99%	99.5%	99.8%	99.9%
	Confidence level C											

Estimating Confidence Intervals: Statistical Significance

- Are M_1 & M_2 **significantly different**?
 - Compute t . Select *significance level* (e.g. $sig = 5\%$)
 - Consult table for t-distribution: Find t value corresponding to $k-1$ *degrees of freedom* (here, 9)
 - t-distribution is symmetric: typically upper % points of distribution shown → look up value for **confidence limit** $z=sig/2$ (here, 0.025)
 - **If $t > z$ or $t < -z$** , then t value lies in rejection region:
 - **Reject null hypothesis** that mean error rates of M_1 & M_2 are same
 - Conclude: statistically significant difference between M_1 & M_2
 - **Otherwise**, conclude that any difference is **chance**

Model Selection: ROC Curves

- **ROC** (Receiver Operating Characteristics) curves: for visual comparison of classification models
- Originated from signal detection theory
- Shows the trade-off between the true positive rate and the false positive rate
- The area under the ROC curve is a measure of the accuracy of the model
- Rank the test tuples in decreasing order: the one that is most likely to belong to the positive class appears at the top of the list
- The closer to the diagonal line (i.e., the closer the area is to 0.5), the less accurate is the model

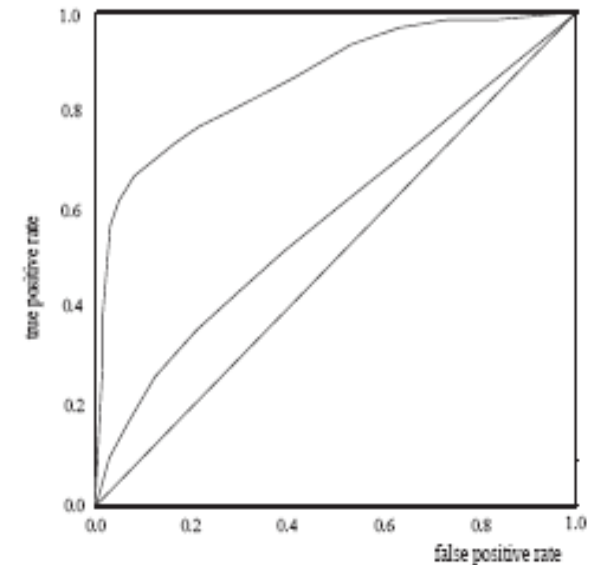

- Vertical axis represents the true positive rate
- Horizontal axis rep. the false positive rate
- The plot also shows a diagonal line
- A model with perfect accuracy will have an area of 1.0

Issues Affecting Model Selection


- **Accuracy**
 - classifier accuracy: predicting class label
- **Speed**
 - time to construct the model (training time)
 - time to use the model (classification/prediction time)
- **Robustness:** handling noise and missing values
- **Scalability:** efficiency in disk-resident databases
- **Interpretability**
 - understanding and insight provided by the model
- Other measures, e.g., goodness of rules, such as decision tree size or compactness of classification rules

Techniques to Improve Classification Accuracy: Ensemble Methods


Ensemble Methods

- Construct a set of classifiers from the training data
- Predict class label of previously unseen records by aggregating predictions made by multiple classifiers

General Idea

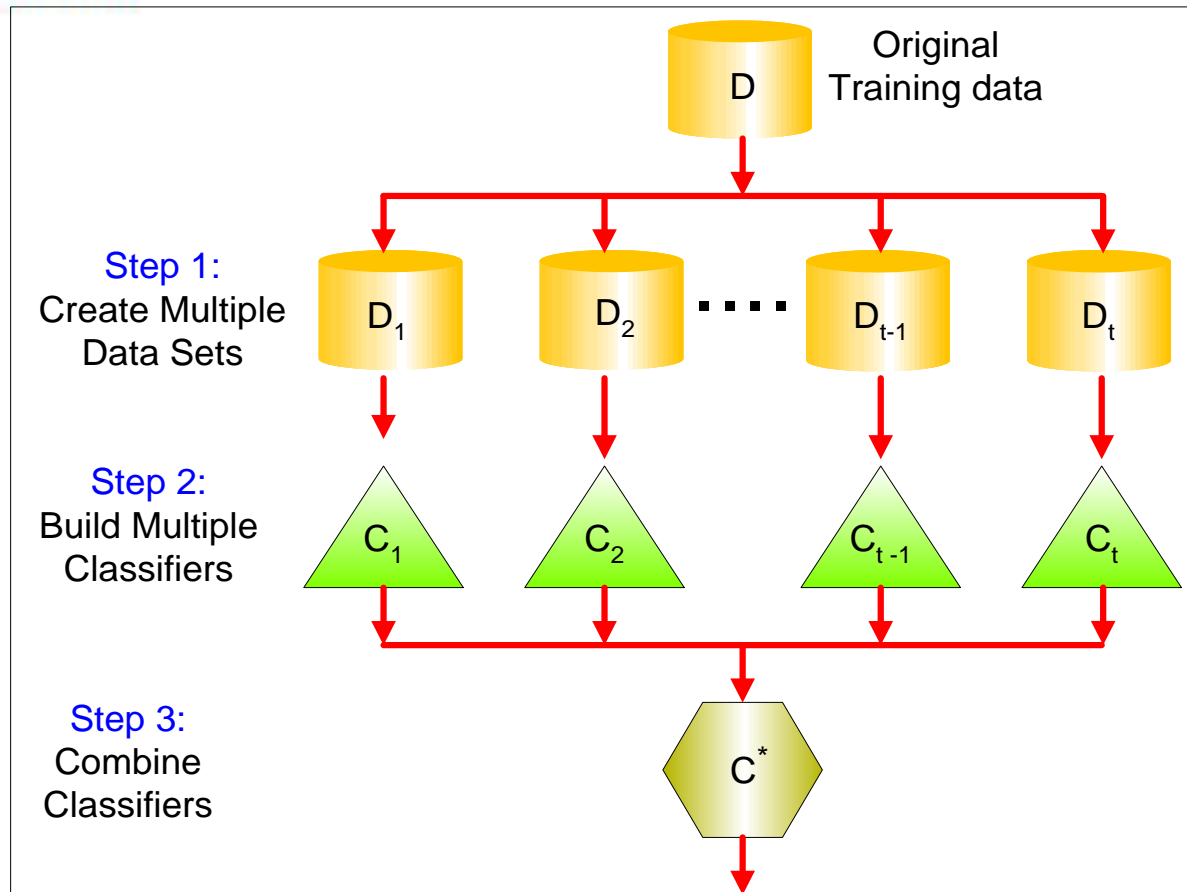

Ensemble Methods: Increasing the Accuracy

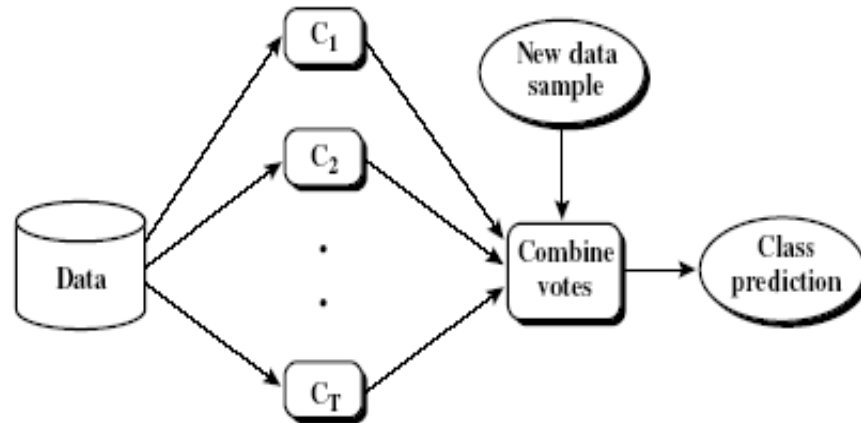

- Ensemble methods
 - Use a combination of models to increase accuracy
 - Combine a series of k learned models, M_1, M_2, \dots, M_k , with the aim of creating an improved model M^*
- Popular ensemble methods
 - **Bagging**: averaging the prediction over a collection of classifiers
 - **Boosting**: weighted vote with a collection of classifiers
 - Ensemble: combining a set of heterogeneous classifiers

Bagging: Bootstrap Aggregation

- Analogy: Diagnosis based on multiple doctors' majority vote
- Training
 - Given a set D of d tuples, at each iteration i , a training set D_i of d tuples is sampled with replacement from D (i.e., bootstrap)
 - A classifier model M_i is learned for each training set D_i
- Classification: classify an unknown sample X
 - Each classifier M_i returns its class prediction
 - The bagged classifier M^* counts the votes and assigns the class with the most votes to X
- Prediction: can be applied to the prediction of continuous values by taking the average value of each prediction for a given test tuple
- Accuracy
 - Often significantly better than a single classifier derived from D
 - For noise data: not considerably worse, more robust
 - Proved improved accuracy in prediction

Bagging

- Sampling with replacement

Original Data	1	2	3	4	5	6	7	8	9	10
Bagging (Round 1)	7	8	10	8	2	5	10	10	5	9
Bagging (Round 2)	1	4	9	1	2	3	2	7	3	2
Bagging (Round 3)	1	8	5	10	5	5	9	6	3	7

- Build classifier on each bootstrap sample
- Each sample has probability $(1 - 1/n)^n$ of being selected

Boosting

- Analogy: Consult several doctors, based on a combination of weighted diagnoses—weight assigned based on the previous diagnosis accuracy
- How boosting works?
 - **Weights** are assigned to each training tuple
 - A series of k classifiers is iteratively learned
 - After a classifier M_i is learned, the weights are updated to allow the subsequent classifier, M_{i+1} , to **pay more attention to the training tuples that were misclassified** by M_i
 - The final **M^* combines the votes** of each individual classifier, where the weight of each classifier's vote is a function of its accuracy
- Boosting algorithm can be extended for numeric prediction
- Comparing with bagging: Boosting tends to have greater accuracy, but it also risks overfitting the model to misclassified data

Boosting

- Records that are wrongly classified will have their weights increased
- Records that are classified correctly will have their weights decreased

Original Data	1	2	3	4	5	6	7	8	9	10
Boosting (Round 1)	7	3	2	8	7	9	4	10	6	3
Boosting (Round 2)	5	4	9	4	2	5	1	7	4	2
Boosting (Round 3)	4	4	8	10	4	5	4	6	3	4

- Example 4 is hard to classify
- Its weight is increased, therefore it is more likely to be chosen again in subsequent rounds

Example: Adaboost

- Proposed by Freund and Schapire, 1997
- Given a set of d class-labeled tuples, $(\mathbf{X}_1, y_1), \dots, (\mathbf{X}_d, y_d)$
- Initially, all the weights of tuples are set the same ($1/d$)
- Generate k classifiers in k rounds. At round i ,
 - Tuples from D are sampled (with replacement) to form a training set D_i of the same size
 - Each tuple's chance of being selected is based on its weight
 - A classification model M_i is derived from D_i
 - Its error rate is calculated using D_i as a test set
 - If a tuple is misclassified, its weight is increased, o.w. it is decreased
- Error rate: $err(\mathbf{X}_j)$ is the misclassification error of tuple \mathbf{X}_j . Classifier M_i error rate is the sum of the weights of the misclassified tuples:

$$error(M_i) = \sum_j^d w_j \times err(\mathbf{X}_j)$$

- The weight of classifier M_i 's vote is $\log \frac{1 - error(M_i)}{error(M_i)}$


Example: AdaBoost

- Base classifiers: C_1, C_2, \dots, C_T
- Error rate:

$$\varepsilon_i = \frac{1}{N} \sum_{j=1}^N w_j \delta(C_i(x_j) \neq y_j)$$

- Importance of a classifier:

$$\alpha_i = \frac{1}{2} \ln \left(\frac{1 - \varepsilon_i}{\varepsilon_i} \right)$$

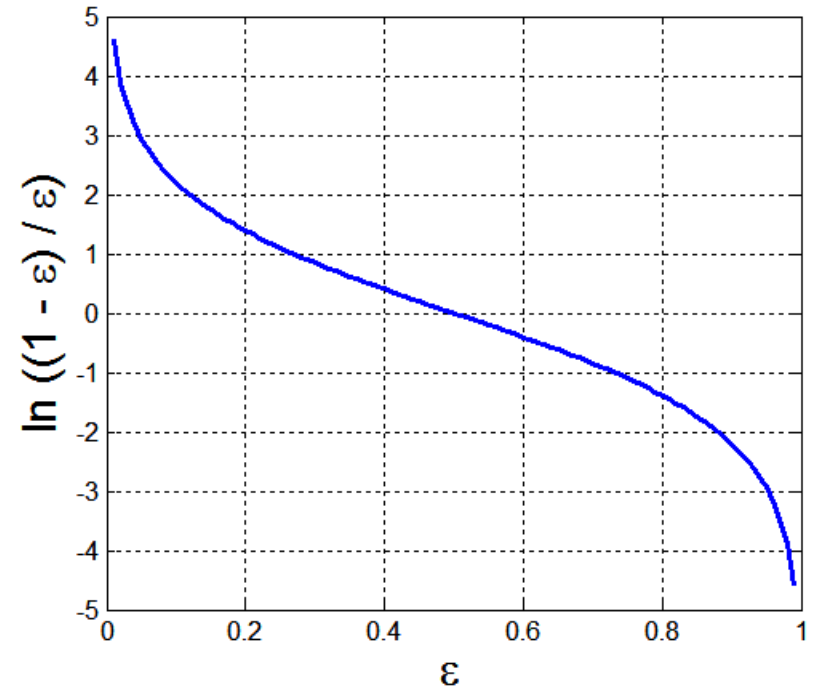

Random Forest (Breiman 2001)

- Random Forest:
 - Each classifier in the ensemble is a *decision tree* classifier and is generated using a random selection of attributes at each node to determine the split
 - During classification, each tree votes and the most popular class is returned
- Two Methods to construct Random Forest:
 - Forest-RI (*random input selection*): Randomly select, at each node, F attributes as candidates for the split at the node. The CART methodology is used to grow the trees to maximum size
 - Forest-RC (*random linear combinations*): Creates new attributes (or features) that are a linear combination of the existing attributes (reduces the correlation between individual classifiers)
- Comparable in accuracy to Adaboost, but more robust to errors and outliers
- Insensitive to the number of attributes selected for consideration at each split, and faster than bagging or boosting

Classification of Class-Imbalanced Data Sets

- Class-imbalance problem: Rare positive example but numerous negative ones, e.g., medical diagnosis, fraud, oil-spill, fault, etc.
- Traditional methods assume a balanced distribution of classes and equal error costs: not suitable for class-imbalanced data
- Typical methods for imbalance data in 2-class classification:
 - **Oversampling**: re-sampling of data from positive class
 - **Under-sampling**: randomly eliminate tuples from negative class
 - **Threshold-moving**: moves the decision threshold, t , so that the rare class tuples are easier to classify, and hence, less chance of costly false negative errors
 - Ensemble techniques: Ensemble multiple classifiers introduced above
- Still difficult for class imbalance problem on multiclass tasks

The background is a solid blue color with three large, overlapping, semi-transparent circles of a lighter shade of blue. The circles are arranged in a triangular pattern, with one circle on the left and two on the right, overlapping each other and the left one.

Additional Topics on Classification

Multiclass Classification

- Classification involving more than two classes (i.e., > 2 Classes)
- Method 1. **One-vs.-all** (OVA): Learn a classifier one at a time
 - Given m classes, train m classifiers: one for each class
 - Classifier j : treat tuples in class j as *positive* & all others as *negative*
 - To classify a tuple \mathbf{X} , the set of classifiers vote as an ensemble
- Method 2. **All-vs.-all** (AVA): Learn a classifier for each pair of classes
 - Given m classes, construct $m(m-1)/2$ binary classifiers
 - A classifier is trained using tuples of the two classes
 - To classify a tuple \mathbf{X} , each classifier votes. \mathbf{X} is assigned to the class with maximal vote
- Comparison
 - All-vs.-all tends to be superior to one-vs.-all
 - Problem: Binary classifier is sensitive to errors, and errors affect vote count


Error-Correcting Codes for Multiclass Classification

- Originally designed to correct errors during data transmission for communication tasks by exploring data redundancy
- Example
 - A 7-bit codeword associated with classes 1-4

Class	Error-Corr. Codeword						
C_1	1	1	1	1	1	1	1
C_2	0	0	0	0	1	1	1
C_3	0	0	1	1	0	0	1
C_4	0	1	0	1	0	1	0


- Given a unknown tuple \mathbf{X} , the 7-trained classifiers output: 0001010
 - Hamming distance: # of different bits between two codewords
 - $H(\mathbf{X}, C_1) = 5$, by checking # of bits between [1111111] & [0001010]
 - $H(\mathbf{X}, C_2) = 3$, $H(\mathbf{X}, C_3) = 3$, $H(\mathbf{X}, C_4) = 1$, thus C_4 as the label for \mathbf{X}
- Error-correcting codes can correct up to $(h - 1)/2$ 1-bit error, where h is the minimum Hamming distance between any two codewords
- If we use 1-bit per class, it is equiv. to one-vs.-all approach, the code are insufficient to self-correct
- When selecting error-correcting codes, there should be good row-wise and col.-wise separation between the codewords

Semi-Supervised Classification

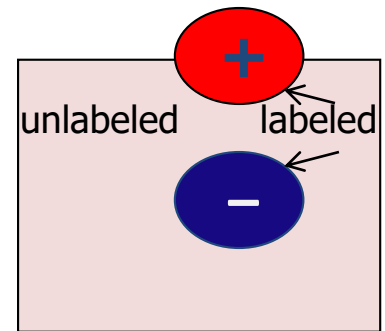

- Semi-supervised: Uses labeled and unlabeled data to build a classifier
- Self-training:
 - Build a classifier using the labeled data
 - Use it to label the unlabeled data, and those with the most confident label prediction are added to the set of labeled data
 - Repeat the above process
 - Adv: easy to understand; disadv: may reinforce errors
- Co-training: Use two or more classifiers to teach each other
 - Each learner uses a mutually independent set of features of each tuple to train a good classifier, say f_1
 - Then f_1 and f_2 are used to predict the class label for unlabeled data X
 - Teach each other: The tuple having the most confident prediction from f_1 is added to the set of labeled data for f_2 , & vice versa
- Other methods, e.g., joint probability distribution of features and labels


Active Learning

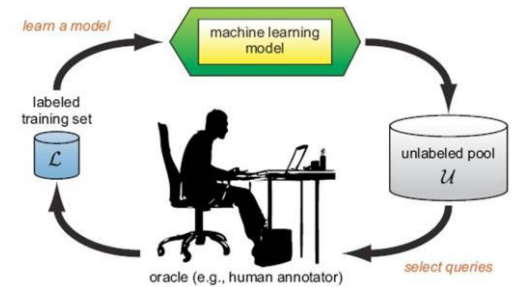

- Class labels are expensive to obtain
- Active learner: query human (oracle) for labels
- Pool-based approach: Uses a pool of unlabeled data
 - \mathcal{L} : a small subset of D is labeled, \mathcal{U} : a pool of unlabeled data in D
 - Use a query function to carefully select one or more tuples from \mathcal{U} and request labels from an oracle (a human annotator)
 - The newly labeled samples are added to \mathcal{L} , and learn a model
 - Goal: Achieve high accuracy using as few labeled data as possible
- Evaluated using *learning curves*: Accuracy as a function of the number of instances queried (# of tuples to be queried should be small)
- Research issue: How to choose the data tuples to be queried?
 - Uncertainty sampling: choose the least certain ones
 - Reduce *version space*, the subset of hypotheses consistent w. the training data
 - Reduce expected entropy over \mathcal{U} : Find the greatest reduction in the total number of incorrect predictions

Transfer Learning: Conceptual Framework

- Transfer learning: Extract knowledge from one or more source tasks and apply the knowledge to a target task
- Traditional learning: Build a new classifier for each new task
- Transfer learning: Build new classifier by applying existing knowledge learned from source tasks

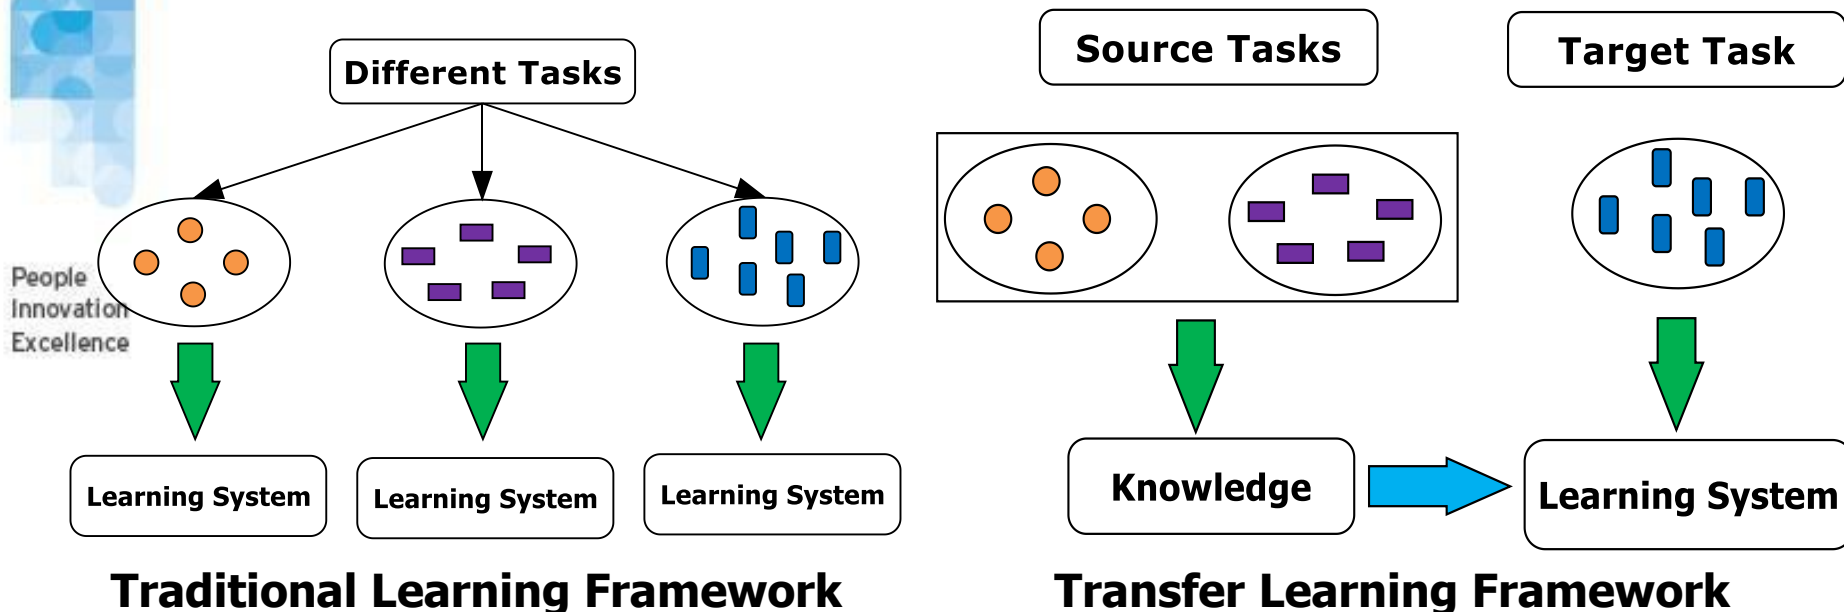

Transfer Learning: Methods and Applications

- Applications: Especially useful when data is outdated or distribution changes, e.g., Web document classification, e-mail spam filtering
- *Instance-based transfer learning*: Reweight some of the data from source tasks and use it to learn the target task
- TrAdaBoost (Transfer AdaBoost)
 - Assume source and target data each described by the same set of attributes (features) & class labels, but rather diff. distributions
 - Require only labeling a small amount of target data
 - Use source data in training: When a source tuple is misclassified, reduce the weight of such tuples so that they will have less effect on the subsequent classifier
- Research issues
 - Negative transfer: When it performs worse than no transfer at all
 - Heterogeneous transfer learning: Transfer knowledge from different feature space or multiple source domains
 - Large-scale transfer learning

The background is a solid blue color with a gradient. There are two large, overlapping circles of a lighter blue shade. One circle is positioned in the upper left, and the other is in the upper right. They overlap in the center of the page.

Summary

Summary (1)

- Effective and advanced classification methods
 - Backpropagation (Neural networks)
 - Support Vector Machine (SVM)
 - Other classification methods: lazy learners (KNN, case-based reasoning), genetic algorithms, rough set and fuzzy set approaches
- **Evaluation metrics** include: accuracy, sensitivity, specificity, precision, recall, F measure, and F_{β} measure.
- **Stratified k-fold cross-validation** is recommended for accuracy estimation. **Bagging** and **boosting** can be used to increase overall accuracy by learning and combining a series of individual models.

Summary (2)

- **Significance tests** and **ROC curves** are useful for model selection.
- There have been numerous **comparisons of the different classification methods**; the matter remains a research topic
- No single method has been found to be superior over all others for all data sets
- Issues such as accuracy, training time, robustness, scalability, and interpretability must be considered and can involve trade-offs, further complicating the quest for an overall superior method
- Additional Topics on Classification
 - Multiclass classification, Semi-supervised classification, Active learning, etc.

References

1. Han, J., Kamber, M., & Pei, Y. (2006). "Data Mining: Concepts and Technique". Edisi 3. Morgan Kaufman. San Francisco
2. Tan, P.N., Steinbach, M., & Kumar, V. (2006). "Introduction to Data Mining". Addison-Wesley. Michigan
3. Witten, I. H., & Frank, E. (2005). "Data Mining : Practical Machine Learning Tools and Techniques". Second edition. Morgan Kaufmann. San Francisco



BINUS
UNIVERSITY
ONLINE
LEARNING

Thank You

People
Innovation
Excellence